### 1. General description

The 74HC237-Q100 is a 3-to-8 line decoder, demultiplexer with latches at the three address inputs (An). The 74HC237-Q100 essentially combines the 3-to-8 decoder function with a 3-bit storage latch. When the latch is enabled ( $\overline{\text{LE}}$  = LOW), the 74HC237-Q100 acts as a 3-to-8 active LOW decoder. When the latch enable ( $\overline{\text{LE}}$ ) goes from LOW-to-HIGH, the last data present at the inputs before this transition, is stored in the latches. Further address changes are ignored as long as  $\overline{\text{LE}}$  remains HIGH. The output enable input ( $\overline{\text{E}}$ 1 and  $\overline{\text{E}}$ 2) controls the state of the outputs independent of the address inputs or latch operation. All outputs are HIGH unless  $\overline{\text{E}}$ 1 is LOW and  $\overline{\text{E}}$ 2 is HIGH. The 74HC237-Q100 is ideally suited for implementing non-overlapping decoders in 3-state systems and strobes (stored address) applications in bus-oriented systems.

This product has been qualified to the Automotive Electronics Council (AEC) standard Q100 (Grade 1) and is suitable for use in automotive applications.

#### 2. Features and benefits

- Automotive product qualification in accordance with AEC-Q100 (Grade 1)
  - Specified from -40 °C to +85 °C and from -40 °C to +125 °C
- Combines 3-to-8 decoder with 3-bit latch
- Multiple input enable for easy expansion or independent controls
- · Active HIGH mutually exclusive outputs
- Wide supply voltage range from 2.0 V to 6.0 V
- CMOS low power dissipation
- High noise immunity
- Latch-up performance exceeds 100 mA per JESD 78 Class II Level B
- Complies with JEDEC standards:
  - JESD8C (2.7 V to 3.6 V)
  - JESD7A (2.0 V to 6.0 V)
- ESD protection:
  - HBM: ANSI/ESDA/JEDEC JS-001 class 2 exceeds 2000 V
  - CDM: ANSI/ESDA/JEDEC JS-002 class C3 exceeds 1000 V


# 3. Ordering information

**Table 1. Ordering information** 

Type number	Package							
	Temperature range	Name	Description	Version				
74HC237D-Q100	-40 °C to +125 °C		plastic small outline package; 16 leads; body width 3.9 mm	SOT109-1				




# 4. Functional diagram

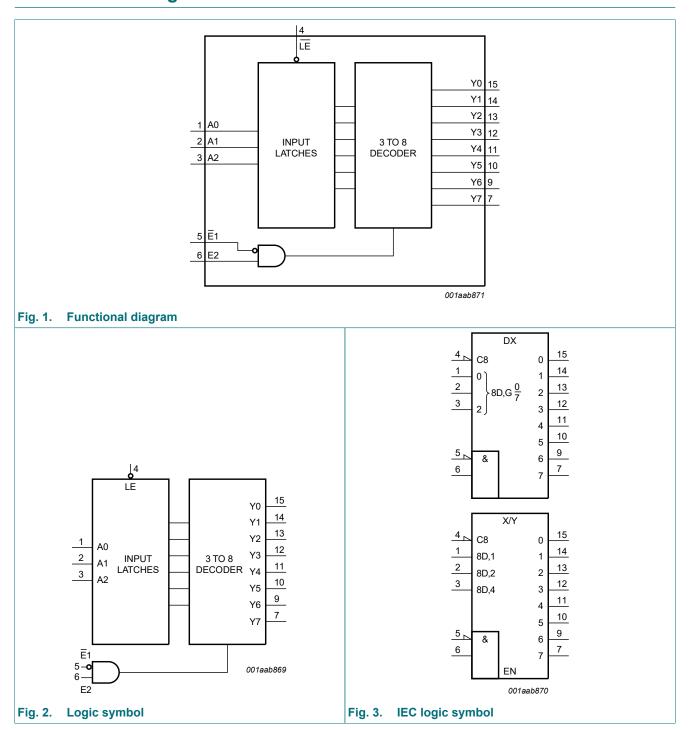


Nexperia 74HC237-Q100

### 3-to-8 line decoder, demultiplexer with address latches

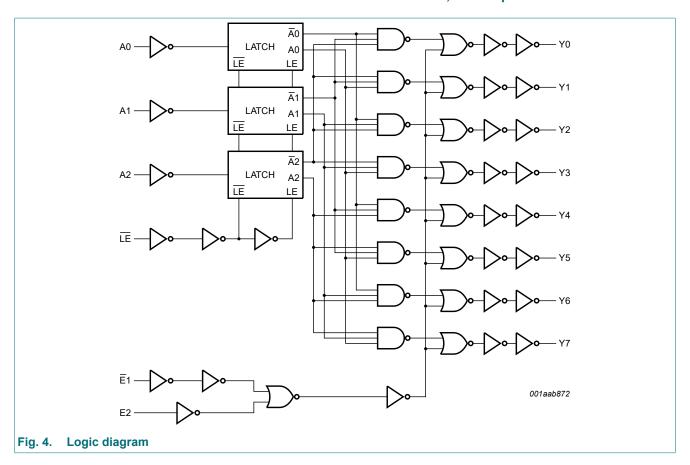

# 5. Pinning information

### 5.1. Pinning

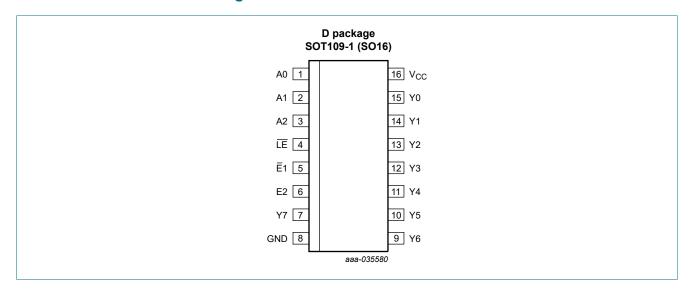

### 5.2. Pin description

Table 2. Pin description

Symbol	Pin	Description
A0, A1, A2	1, 2, 3	data input
LE	4	latch enable input (active LOW)
E1	5	data enable input 1 (active LOW)
E2	6	data enable input 2 (active HIGH)
Y0, Y1, Y2, Y3, Y4, Y5, Y6, Y7	15, 14, 13, 12, 11, 10, 9, 7	output
GND	8	ground (0 V)
V <sub>CC</sub>	16	supply voltage

## 6. Functional description

#### Table 3. Function table

H = HIGH voltage level; L = LOW voltage level; X = don't care.

Enable			Input			Output							
LE	E1	E2	A0	A1	A2	Y0	Y1	Y2	Y3	Y4	Y5	Y6	Y7
Н	L	Н	Х	Х	Х	stable							
X	Н	Х	Х	X	Х	L	L	L	L	L	L	L	L
X	Х	L	Х	Х	Х	L	L	L	L	L	L	L	L
L	L	Н	L	L	L	Н	L	L	L	L	L	L	L
L	L	Н	Н	L	L	L	Н	L	L	L	L	L	L
L	L	Н	L	Н	L	L	L	Н	L	L	L	L	L
L	L	Н	Н	Н	L	L	L	L	Н	L	L	L	L
L	L	Н	L	L	Н	L	L	L	L	Н	L	L	L
L	L	Н	Н	L	Н	L	L	L	L	L	Н	L	L
L	L	Н	L	Н	Н	L	L	L	L	L	L	Н	L
L	L	Н	Н	Н	Н	L	L	L	L	L	L	L	Н

# 7. Limiting values

#### **Table 4. Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Max	Unit
$V_{CC}$	supply voltage		-0.5	+7	V
I <sub>IK</sub>	input clamping current	$V_{I} < -0.5 \text{ V or } V_{I} > V_{CC} + 0.5 \text{ V}$	-	±20	mA
I <sub>OK</sub>	output clamping current	$V_{O} < -0.5 \text{ V or } V_{O} > V_{CC} + 0.5 \text{ V}$	-	±20	mA
I <sub>O</sub>	output current	$V_{O} = -0.5 \text{ V to } (V_{CC} + 0.5 \text{ V})$	-	±25	mA
I <sub>CC</sub>	supply current		-	+50	mA
$I_{GND}$	ground current		-	-50	mA
T <sub>stg</sub>	storage temperature		-65	+150	°C
P <sub>tot</sub>	total power dissipation	[1]	-	500	mW

<sup>[1]</sup> For SOT109-1 (SO16) package:  $P_{tot}$  derates linearly with 12.4 mW/K above 110  $^{\circ}\text{C}.$ 

# 8. Recommended operating conditions

#### Table 5. Recommended operating conditions

Voltages are referenced to GND (ground = 0 V)

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
V <sub>CC</sub>	supply voltage		2.0	5.0	6.0	V
VI	input voltage		0	-	V <sub>CC</sub>	V
Vo	output voltage		0	-	V <sub>CC</sub>	V
T <sub>amb</sub>	ambient temperature		-40	+25	+125	°C
Δt/ΔV	input transition rise and fall rate	V <sub>CC</sub> = 2.0 V	-	-	625	ns/V
		V <sub>CC</sub> = 4.5 V	-	1.67	139	ns/V
		V <sub>CC</sub> = 6.0 V	-	-	83	ns/V

## 9. Static characteristics

#### **Table 6. Static characteristics**

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		25 °C		-40 °C to	o +85 °C	-40 °C to +125 °C		Unit
			Min	Тур	Max	Min	Max	Min	Max	
V <sub>IH</sub>	HIGH-level	V <sub>CC</sub> = 2.0 V	1.5	1.2	-	1.5	-	1.5	-	V
	input voltage	V <sub>CC</sub> = 4.5 V	3.15	2.4	-	3.15	-	3.15	-	V
		V <sub>CC</sub> = 6.0 V	4.2	3.2	-	4.2	-	4.2	-	V
V <sub>IL</sub>	LOW-level input	V <sub>CC</sub> = 2.0 V	-	0.8	0.5	-	0.5	-	0.5	V
	voltage	V <sub>CC</sub> = 4.5 V	-	2.1	1.35	-	1.35	-	1.35	V
		V <sub>CC</sub> = 6.0 V	-	2.8	1.8	-	1.8	-	1.8	V
V <sub>OH</sub>	HIGH-level	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>								
	output voltage	I <sub>O</sub> = -20 μA; V <sub>CC</sub> = 2.0 V	1.9	2.0	-	1.9	-	1.9	-	V
		I <sub>O</sub> = -20 μA; V <sub>CC</sub> = 4.5 V	4.4	4.5	-	4.4	-	4.4	-	V
		I <sub>O</sub> = -20 μA; V <sub>CC</sub> = 6.0 V	5.9	6.0	-	5.9	-	5.9	-	V
		$I_O = -4.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	3.98	4.32	-	3.84	-	3.7	-	V
		$I_{O}$ = -5.2 mA; $V_{CC}$ = 6.0 V	5.48	5.81	-	5.34	-	5.2	-	V
V <sub>OL</sub>	LOW-level	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>								
	output voltage	$I_O = 20 \mu A; V_{CC} = 2.0 V$	-	0	0.1	-	0.1	-	0.1	V
		I <sub>O</sub> = 20 μA; V <sub>CC</sub> = 4.5 V	-	0	0.1	-	0.1	-	0.1	V
		I <sub>O</sub> = 20 μA; V <sub>CC</sub> = 6.0 V	-	0	0.1	-	0.1	-	0.1	V
		$I_O = 4.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	-	0.15	0.26	-	0.33	-	0.4	V
		$I_O = 5.2 \text{ mA}; V_{CC} = 6.0 \text{ V}$	-	0.16	0.26	-	0.33	-	0.4	V
I <sub>I</sub>	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 6.0 \text{ V}$	-	-	±0.1	-	±1.0	-	±1.0	μΑ
I <sub>CC</sub>	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 6.0 \text{ V}$	-	-	8.0	-	80	-	160	μΑ
C <sub>I</sub>	input capacitance		-	3.5	-	-	-	-	-	pF

# 10. Dynamic characteristics

**Table 7. Dynamic characteristics** 

Voltages are referenced to GND (ground = 0 V);  $C_L$  = 50 pF unless otherwise specified; for test circuit see Fig. 8.

Symbol	Parameter	Conditions			25 °C		-40 °C	to +85 °C	-40 °C to +125 °C		Unit
				Min	Тур	Max	Min	Max	Min	Max	
t <sub>pd</sub>	propagation	An to Yn; see Fig. 5	[1]								
	delay	V <sub>CC</sub> = 2.0 V		-	52	160	-	200	-	240	ns
		V <sub>CC</sub> = 4.5 V		-	19	32	-	40	-	48	ns
		V <sub>CC</sub> = 5 V; C <sub>L</sub> = 15 pF		-	16	-	-	-	-	-	ns
		V <sub>CC</sub> = 6.0 V		-	15	27	-	34	-	41	ns
		LE to Yn; see Fig. 5	[1]								
		V <sub>CC</sub> = 2.0 V		-	61	190	-	240	-	285	ns
		V <sub>CC</sub> = 4.5 V		-	22	38	-	48	-	57	ns
		$V_{CC} = 5 \text{ V}; C_L = 15 \text{ pF}$		-	19	-	-	-	-	-	ns
		V <sub>CC</sub> = 6.0 V		-	18	32	-	41	-	48	ns
		E1to Yn; see Fig. 6	[1]								
		V <sub>CC</sub> = 2.0 V		-	47	145	-	180	-	220	ns
		V <sub>CC</sub> = 4.5 V		-	17	29	-	36	-	44	ns
		$V_{CC} = 5 \text{ V}; C_L = 15 \text{ pF}$		-	14	-	-	-	-	-	ns
		V <sub>CC</sub> = 6.0 V		-	14	25	-	31	-	38	ns
		E2 to Yn; see Fig. 5	[1]								
		V <sub>CC</sub> = 2.0 V		-	47	145	-	180	-	220	ns
		V <sub>CC</sub> = 4.5 V		-	17	29	-	36	-	44	ns
		$V_{CC} = 5 \text{ V}; C_L = 15 \text{ pF}$		-	14	-	-	-	-	-	ns
		V <sub>CC</sub> = 6.0 V		-	14	25	-	31	-	38	ns
t <sub>t</sub>	transition time	Yn; see <u>Fig. 5</u> and <u>Fig. 6</u>	[2]								
		V <sub>CC</sub> = 2.0 V		-	19	75	-	95	-	110	ns
		V <sub>CC</sub> = 4.5 V		-	7	15	-	19	-	22	ns
		V <sub>CC</sub> = 6.0 V		-	6	13	-	16	-	19	ns
t <sub>W</sub>	pulse width	LE HIGH; see Fig. 7									
		V <sub>CC</sub> = 2.0 V		50	11	-	65	-	75	-	ns
		V <sub>CC</sub> = 4.5 V		10	4	-	13	-	15	-	ns
		V <sub>CC</sub> = 6.0 V		9	3	-	11	-	13	-	ns
t <sub>su</sub>	set-up time	An to LE; see Fig. 7									
		V <sub>CC</sub> = 2.0 V		50	6	-	65	-	75	-	ns
		V <sub>CC</sub> = 4.5 V		10	2	-	13	-	15	-	ns
		V <sub>CC</sub> = 6.0 V		9	2	-	11	-	13	-	ns

**Nexperia** 74HC237-Q100

#### 3-to-8 line decoder, demultiplexer with address latches

Symbol	Parameter	Conditions	25 °C		-40 °C to +85 °C		-40 °C to +125 °C		Unit	
			Min	Тур	Max	Min	Max	Min	Max	
t <sub>h</sub>	hold time	An to LE; see Fig. 7					-			
		V <sub>CC</sub> = 2.0 V	30	3	-	40	-	45	-	ns
		V <sub>CC</sub> = 4.5 V	6	1	-	8	-	9	-	ns
		V <sub>CC</sub> = 6.0 V	5	1	-	7	-	8	-	ns
C <sub>PD</sub>	power dissipation capacitance	$C_L$ = 50 pF; f = 1 MHz; [3] $V_I$ = GND to $V_{CC}$	-	60	-	-	-	-	-	pF

- $t_{pd}$  is the same as  $t_{PLH}$  and  $t_{PHL}$ .
- $t_t$  is the same as  $t_{THL}$  and  $t_{TLH}$ .  $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu W$ ).

 $P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \sum (C_L \times V_{CC}^2 \times f_o)$  where:

 $f_i$  = input frequency in MHz;


fo = output frequency in MHz;

C<sub>L</sub> = output load capacitance in pF;

V<sub>CC</sub> = supply voltage in V;

N = number of inputs switching;  $\sum (C_L \times V_{CC}^2 \times f_0) = \text{sum of outputs.}$ 


### 10.1. Waveforms and test circuit

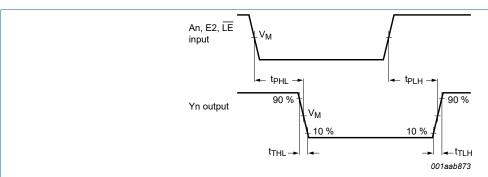

Measurement points are given in Table 8.

 $V_{\text{OL}}$  and  $V_{\text{OH}}$  are typical voltage output levels that occur with the output load.


Propagation delay input (An) and enable inputs (E2, LE) to output (Yn) and output transition time Fig. 5.

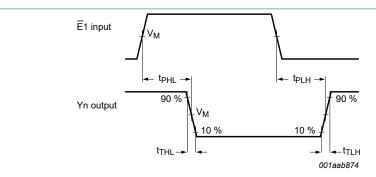

Measurement points are given in <u>Table 8</u>.

V<sub>OL</sub> and V<sub>OH</sub> are typical voltage output levels that occur with the output load.

Propagation enable inputs (E1) to output (Yn) and output transition time




Measurement points are given in Table 8.

V<sub>OL</sub> and V<sub>OH</sub> are typical voltage output levels that occur with the output load.

Fig. 7. The data input (An) to latch enable input (\overline{LE}) set-up times, latch enable input (\overline{LE}) to data input (An) hold times and latch enable input (\overline{LE}) pulse width

**Table 8. Measurement points** 

Input	Output			
$V_{M}$	$V_{M}$			
0.5 × V <sub>CC</sub>	0.5 × V <sub>CC</sub>			

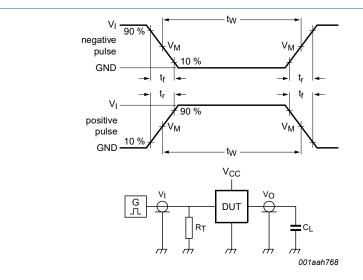

Test data is given in Table 9.

Definitions test circuit:

 $R_T$  = Termination resistance should be equal to output impedance  $Z_o$  of the pulse generator;


C<sub>L</sub> = Load capacitance including jig and probe capacitance.

Fig. 8. Test circuit for measuring switching times

Table 9. Test data

Input		Load	Test
V <sub>I</sub>	t <sub>r</sub> , t <sub>f</sub>	CL	
V <sub>CC</sub>	6.0 ns	15 pF, 50 pF	t <sub>PLH</sub> , t <sub>PHL</sub>

# 11. Application information

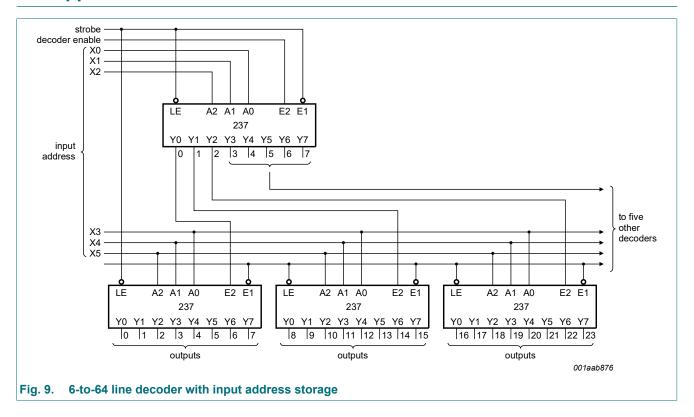

# 12. Package outline

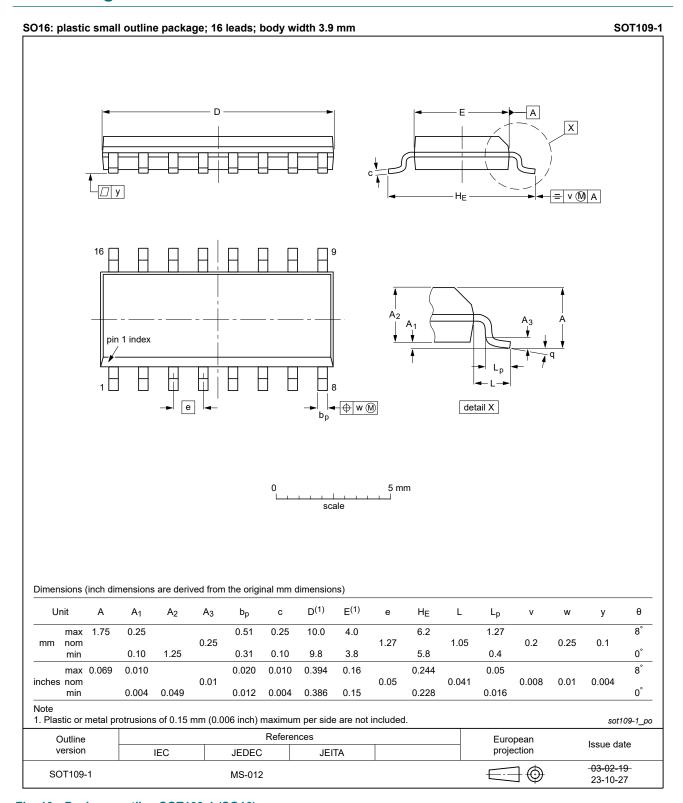


Fig. 10. Package outline SOT109-1 (SO16)

### 13. Abbreviations

#### **Table 10. Abbreviations**

Acronym	Description			
CDM	Charged Device Model			
CMOS	mplementary Metal Oxide Semiconductor			
DUT	Device Under Test			
ESD	ElectroStatic Discharge			
НВМ	Human Body Model			
TTL	Transistor-Transistor Logic			

# 14. Revision history

#### **Table 11. Revision history**

Document ID	Release date	Data sheet status	Change notice	Supersedes					
74HC237_Q100 v.3	20240111	Product data sheet	-	74HC237_Q100 v.2					
Modifications:		<ul> <li>Section 2: ESD specification updated according to the latest JEDEC standard.</li> <li>Fig. 10: Aligned SO package outline drawing to JEDEC MS-012</li> </ul>							
74HC237_Q100 v.2	20211026	Product data sheet	-	74HC237_Q100 v.1					
Modifications:	guidelines o Legal texts   Section 1 ar	of this data sheet has been if Nexperia. have been adapted to the r nd <u>Section 2</u> updated. Derating values for P <sub>tot</sub> total	new company nan	ne where appropriate.					
74HC237_Q100 v.1	20130114	Product data sheet	-	-					

Nexperia 74HC237-Q100

# 15. Legal information

#### **Data sheet status**

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <a href="https://www.nexperia.com">https://www.nexperia.com</a>.

#### **Definitions**

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

#### **Disclaimers**

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use in automotive applications** — This Nexperia product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or

## 3-to-8 line decoder, demultiplexer with address latches equipment, nor in applications where failure or malfunction of an Nexperia

equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nexperia.com/profile/terms">http://www.nexperia.com/profile/terms</a>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

#### **Trademarks**

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## **Contents**

1. General description	1
2. Features and benefits	1
3. Ordering information	1
4. Functional diagram	2
5. Pinning information	3
5.1. Pinning	3
5.2. Pin description	4
6. Functional description	4
7. Limiting values	4
8. Recommended operating conditions	5
9. Static characteristics	5
10. Dynamic characteristics	6
10.1. Waveforms and test circuit	7
11. Application information	9
12. Package outline	10
13. Abbreviations	11
14. Revision history	11
15. Legal information	12

For more information, please visit: http://www.nexperia.com For sales office addresses, please send an email to: salesaddresses@nexperia.com Date of release: 11 January 2024

<sup>©</sup> Nexperia B.V. 2024. All rights reserved