

## PMDPB80XP

# 20 V, dual P-channel Trench MOSFET Rev. 1 — 30 May 2012

Product data sheet

#### 1. **Product profile**

## 1.1 General description

Dual P-channel enhancement mode Field-Effect Transistor (FET) in a small and leadless ultra thin DFN2020-6 (SOT1118) Surface-Mounted Device (SMD) plastic package using Trench MOSFET technology.

## 1.2 Features and benefits

- 1.8 V R<sub>DSon</sub> rated for low voltage gate drive
- Trench MOSFET technology
- Small and leadless ultra thin SMD plastic package: 2 x 2 x 0.65 mm
- Exposed drain pad for excellent thermal conduction

## 1.3 Applications

- Charging switch for portable devices
- DC/DC converters
- Small brushless DC motor drive
- Power management in battery-driven portables
- Hard disc and computing power management

#### 1.4 Quick reference data

Table 1. Quick reference data

Symbol	Parameter	Conditions		Min	Тур	Max	Unit
Per transistor							
V <sub>DS</sub>	drain-source voltage	T <sub>j</sub> = 25 °C		-	-	-20	V
V <sub>GS</sub>	gate-source voltage			-12	-	12	V
I <sub>D</sub>	drain current	$V_{GS} = -4.5 \text{ V}; T_{amb} = 25 \text{ °C}; t \le 5 \text{ s}$	<u>[1]</u>	-	-	-3.7	Α
Static characte	eristics (per transistor)						
R <sub>DSon</sub>	drain-source on-state resistance	$V_{GS} = -4.5 \text{ V}; I_D = -2.7 \text{ A}; T_j = 25 \text{ °C}$		-	80	102	mΩ

<sup>[1]</sup> Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated, mounting pad for drain 6 cm<sup>2</sup>.



## 2. Pinning information

Table 2. Pinning information

Pin	Symbol	Description	Simplified outline	Graphic symbol
1	S1	source TR1		D4 D0
2	G1	gate TR1	6 5 4	D1 D2 _   _
3	D2	drain TR2		
4	S2	source TR2		
5	G2	gate TR2		
6	D1	drain TR1	1 2 3	G1 S1 S2 G2
7	D1	drain TR1	Transparent top view	017aaa258
8	D2	drain TR2	SOT1118 (DFN2020-6)	

## 3. Ordering information

Table 3. Ordering information

Type number	Package					
	Name	Description	Version			
PMDPB80XP	DFN2020-6	plastic thermal enhanced ultra thin small outline package; no leads; 6 terminals	SOT1118			

## 4. Marking

Table 4. Marking codes

Type number	Marking code
PMDPB80XP	1U

## 5. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions		Min	Max	Unit
Per transist	or					
$V_{DS}$	drain-source voltage	T <sub>j</sub> = 25 °C		-	-20	V
$V_{GS}$	gate-source voltage			-12	12	V
I <sub>D</sub>	drain current	$V_{GS} = -4.5 \text{ V}; T_{amb} = 25 \text{ °C}; t \le 5 \text{ s}$	<u>[1]</u>	-	-3.7	Α
		V <sub>GS</sub> = -4.5 V; T <sub>amb</sub> = 25 °C	<u>[1]</u>	-	-2.7	Α
		V <sub>GS</sub> = -4.5 V; T <sub>amb</sub> = 100 °C	<u>[1]</u>	-	-1.7	Α
I <sub>DM</sub>	peak drain current	$T_{amb} = 25  ^{\circ}C$ ; single pulse; $t_p \le 10  \mu s$		-	-11	Α
P <sub>tot</sub>	total power dissipation	T <sub>amb</sub> = 25 °C	[2]	-	485	mW
			[1]	-	1100	mW
		T <sub>sp</sub> = 25 °C		-	6250	mW
Source-drai	n diode					
Is	source current	T <sub>amb</sub> = 25 °C	<u>[1]</u>	-	-1.1	Α
Per device						
Tj	junction temperature			-55	150	°C
T <sub>amb</sub>	ambient temperature			-55	150	°C
T <sub>stg</sub>	storage temperature			-65	150	°C

- [1] Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated, mounting pad for drain 6 cm<sup>2</sup>.
- [2] Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint.





Fig 1. Normalized total power dissipation as a function of junction temperature



ig 2. Normalized continuous drain current as a function of junction temperature

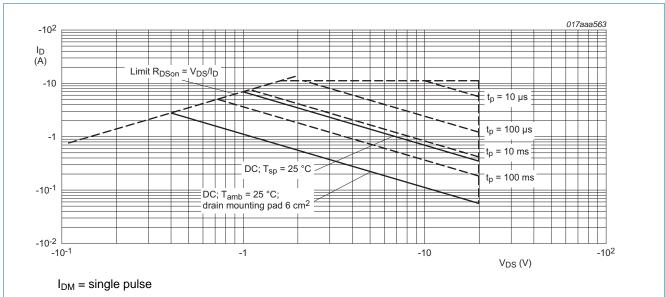


Fig 3. Safe operating area; junction to ambient; continuous and peak drain currents as a function of drain-source voltage

## 6. Thermal characteristics

Table 6. Thermal characteristics

Symbol	Parameter	Conditions		Min	Тур	Max	Unit
Per transist	or						
ui(j a)	thermal resistance		<u>[1]</u>	-	225	260	K/W
	from junction to ambient		[2]	-	99	115	K/W
	ambient	in free air; t ≤ 5 s	[2]	-	54	62	K/W
$R_{th(j\text{-sp})}$	thermal resistance from junction to solder point	in free air		-	16	20	K/W

<sup>[1]</sup> Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.

<sup>[2]</sup> Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for drain 6 cm<sup>2</sup>.

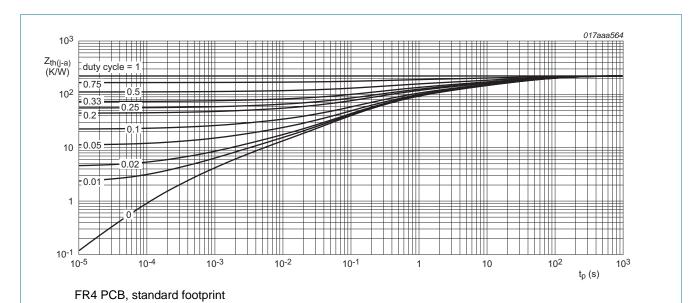


Fig 4. Transient thermal impedance from junction to ambient as a function of pulse duration; typical values

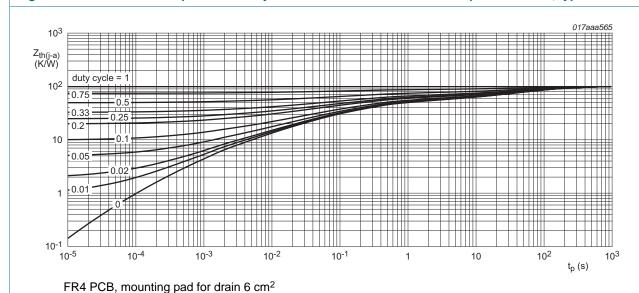


Fig 5. Transient thermal impedance from junction to ambient as a function of pulse duration; typical values

## 7. Characteristics

Table 7. Characteristics

	naracteristics					
Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Static chara	cteristics (per transistor)					
$V_{(BR)DSS}$	drain-source breakdown voltage	$I_D = -250 \mu A; V_{GS} = 0 V; T_j = 25 °C$	-20	-	-	V
$V_{GSth}$	gate-source threshold voltage	$I_D = -250 \mu A; V_{DS} = V_{GS}; T_j = 25 \text{ °C}$	-0.4	-0.6	-1	V
I <sub>DSS</sub>	drain leakage current	$V_{DS} = -20 \text{ V}; V_{GS} = 0 \text{ V}; T_j = 25 \text{ °C}$	-	-	-1	μΑ
		$V_{DS} = -20 \text{ V}; V_{GS} = 0 \text{ V}; T_j = 150 \text{ °C}$	-	-	-10	μΑ
I <sub>GSS</sub>	gate leakage current	$V_{GS} = 12 \text{ V}; V_{DS} = 0 \text{ V}; T_j = 25 \text{ °C}$	-	-	100	nΑ
		$V_{GS} = -12 \text{ V}; V_{DS} = 0 \text{ V}; T_j = 25 \text{ °C}$	-	-	100	nΑ
R <sub>DSon</sub>	drain-source on-state	$V_{GS} = -4.5 \text{ V}; I_D = -2.7 \text{ A}; T_j = 25 \text{ °C}$	-	80	102	mΩ
	resistance	$V_{GS} = -4.5 \text{ V}; I_D = -2.7 \text{ A}; T_j = 150 \text{ °C}$	-	116	148	mΩ
		$V_{GS} = -2.5 \text{ V}; I_D = -2.5 \text{ A}; T_j = 25 \text{ °C}$	-	95	125	mΩ
		$V_{GS} = -1.8 \text{ V}; I_D = -1.1 \text{ A}; T_j = 25 \text{ °C}$	-	120	156	mΩ
9 <sub>fs</sub>	forward transconductance	$V_{DS} = -10 \text{ V}; I_D = -2.7 \text{ A}; T_j = 25 \text{ °C}$	-	15	-	S
Dynamic ch	aracteristics (per transist	or)				
Q <sub>G(tot)</sub>	total gate charge	$V_{DS}$ = -10 V; $I_{D}$ = -2.7 A; $V_{GS}$ = -4.5 V;	-	5.7	8.6	nC
$Q_{GS}$	gate-source charge	T <sub>j</sub> = 25 °C	-	0.7	-	nC
$Q_{GD}$	gate-drain charge		-	0.96	-	nC
C <sub>iss</sub>	input capacitance	$V_{DS} = -10 \text{ V; } f = 1 \text{ MHz; } V_{GS} = 0 \text{ V;}$	-	550	-	pF
C <sub>oss</sub>	output capacitance	T <sub>j</sub> = 25 °C	-	63	-	pF
C <sub>rss</sub>	reverse transfer capacitance		-	53	-	pF
t <sub>d(on)</sub>	turn-on delay time	$V_{DS}$ = -10 V; $I_{D}$ = -2.7 A; $V_{GS}$ = -4.5 V;	-	6	-	ns
t <sub>r</sub>	rise time	$R_{G(ext)} = 6 \Omega; T_j = 25 °C$	-	14	-	ns
t <sub>d(off)</sub>	turn-off delay time		-	120	-	ns
t <sub>f</sub>	fall time		-	50	-	ns
Source-drai	n diode (per transistor)					
$V_{SD}$	source-drain voltage	$I_S = -1.1 \text{ A}; V_{GS} = 0 \text{ V}; T_i = 25 \text{ °C}$	-	-0.8	-1.2	V




Fig 6. Output characteristics: drain current as a function of drain-source voltage; typical values





Fig 8. Drain-source on-state resistance as a function of drain current; typical values



Sub threshold drain surrent so

Fig 7. Sub-threshold drain current as a function of gate-source voltage




Fig 9. Drain-source on-state resistance as a function of gate-source voltage; typical values




Fig 10. Transfer characteristics: drain current as a function of gate-source voltage; typical values




Fig 11. Normalized drain-source on-state resistance as a function of junction temperature; typical values






Fig 12. Gate-source threshold voltage as a function of junction temperature



 $f = 1 MHz; V_{GS} = 0 V$ 

Fig 13. Input, output and reverse transfer capacitances as a function of drain-source voltage; typical values







Fig 14. Gate-source voltage as a function of gate charge; typical values

Fig 15. Gate charge waveform definitions




 $V_{GS} = 0 V$ 

Fig 16. Source current as a function of source-drain voltage; typical values


PMDPB80XP

20 V, dual P-channel Trench MOSFET


## 8. Test information

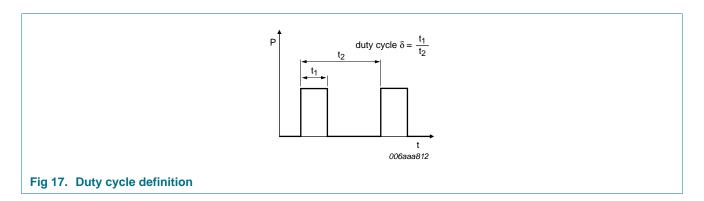

## 9. Package outline

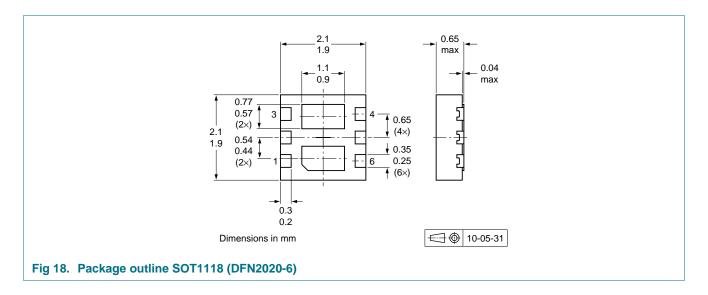

## 10. Soldering

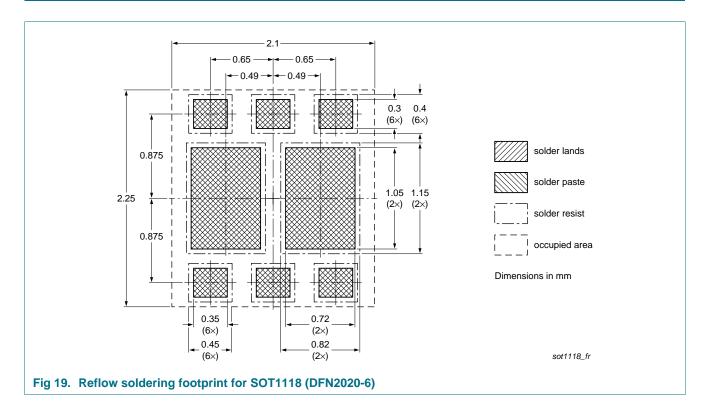

Nexperia PMDPB80XP

20 V, dual P-channel Trench MOSFET

## 11. Revision history

## Table 8. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
PMDPB80XP v.1	20120530	Product data sheet	-	-

## 12. Legal information

#### 12.1 Data sheet status

Document status[1] [2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

#### 12.2 Definitions

**Preview** — The document is a preview version only. The document is still subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet

#### 12.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

PMDPB80XP

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved

Nexperia PMDPB80XP

#### 20 V, dual P-channel Trench MOSFET

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nexperia.com/profile/terms">http://www.nexperia.com/profile/terms</a>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the

product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

#### 12.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

#### 13. Contact information

For more information, please visit:http://www.nexperia.com

For sales office addresses, please send an email to:salesaddresses@nexperia.com

## **Nexperia**

## PMDPB80XP

20 V, dual P-channel Trench MOSFET

## 14. Contents

1	Product profile
1.1	General description
1.2	Features and benefits1
1.3	Applications1
1.4	Quick reference data1
2	Pinning information2
3	Ordering information
4	Marking
5	Limiting values3
6	Thermal characteristics4
7	Characteristics6
8	Test information10
9	Package outline
10	Soldering11
11	Revision history12
12	Legal information13
12.1	Data sheet status
12.2	Definitions
12.3	Disclaimers
12.4	Trademarks14
42	Contact information 4.4